



V 1.3 - 012026

PeopleLink ePodium – Ultra Plus



PeopleLink ePodium – Ultra Plus delivers seamless interactivity among various digital devices. Its ergonomic design allows you to collaborate with your partners, customers, and business associates with technological ease. It provides great productivity benefits due to its modular form factor, enabling easy mobility of the device.

General Specifications

Body	Metallic
Keyboard Slider	Available
Document Camera Tray	Available
Top Sliding	Available
Electronic Monitor Lift	Available
Touch Monitor	Available
Multimedia Controller	Available
Built-in DSP	100W DSP
InstaController	RSI-552

▼ Touch Monitor Features

Screen Size	21.5" Diagonal
Resolution	1920 x 1080
PC Connection	USB Port
Brightness	350 cd/m ²
Input	HDMI
Touch	Finger and Stylus with capacitive touch
Stylus Type	Battery Pen
Display Colors	16.7M

General Specifications

▼ Touch Monitor Features

Response Time	5ms
Contrast Ratio	1000/1
Operating System	Windows, Linux, Mac.

▼ Digital Signal Processor

Frequency Range	30 Hz – 15,000 Hz
Automatic Echo Cancellation	Available
Automatic Gain Control	Available
Dynamic Noise Reduction	Available
Full Duplex	Available
Connectivity	1 × Line Input, 1 × Line Output, 1 × USB Port

▼ Multi-Channel Digital Signal Processor

Wireless Microphone	1 × Lapel / Headworn, 1 × Handheld
Frequency Response	50 Hz – 18,000 Hz
Antennas	2 × 3 dBi
Output	Balanced Out ×2, Mixed Out × 1
Volume Control	Available
Line Input	1 × Balanced, 2 × Unbalanced
Phantom	Available (15 V for Balanced Input)
Power Output @ 8 Ohms	50 Watts × 2
Minimum Impedance	8 Ohms
Frequency Response	20 Hz – 20,000 Hz

Speakers (1 Pair)	50 W Speaker (1" Titanium Dome Tweeter, 5.25" Polypropylene Woofer, 90 Hz–20 kHz Frequency Response)
-------------------	--

▼ Central Controller

Ethernet	10/100 Mbps, Full / Half Duplex, IPv4
RS-232 Ports	Total 3 dedicated RS-232C ports (3-pin 3.81 mm detachable terminal; bidirectional TTL/RS-232 (0–5 V), up to 115200 baud rate)
Power	One 3.5mm DC power jack connector with an associated Power Switch on the rear panel. 12V DC power input with a 1.5 Amp maximum current rating
RS-232 / IR Hybrid Ports	Total 2 RS-232C / IR Ports (3-pin 3.81 mm detachable terminal; Comprises IR/Serial out put ports; Bidirectional TTL/RS-232 (0–5 Volts) port with up to 115200 baud rate when configured as serial; One-way IR output when configured as IR Emitter
Relay Switch Ports	Total 5 blocks (each 2-pin 3.81 mm detachable terminal; Comprises normally open, Non-Isolated relays; Rated 6 Amp, 230 Volts AC or 110 Volts DC max)
Analog Signal	N/A
Operating Temperature	50° to 113° F (10° to 45° C)
Humidity	RH non-condensing, 15% to 85%
Heat Dissipation	45 BTU/hr

General Specifications

▼ 1 x Gooseneck Microphone Features

Cartridge	20 mm Condenser
Frequency Response	40 Hz ~ 20,000 Hz
Polar Pattern	Cardioid
Connector	3-Pin XLR

▼ Control Pad

Control Pad	7 Inches Touch Screen
Resolution	800 × 480
Interface	Wi-Fi
Power	12 V / 1 A
Size	7 Inches
Type	Touch Screen
Internal Memory	2 GB

▼ Laptop Interface

USB Type C	2
USB 2.0 Type A	3
USB 3.0 Type A	3
Aux	2
LAN	2
HDMI-In	4
HDMI-Out	1
RS232	1

▼ Power Socket

HDMI-Out	2
USB 3.0 Type A	1
POE LAN	1
Aux	1
Speaker-Out	1

XLE Output	1
AC In	1
MCB Switch	1

▼ Electrical

Power	100 – 250V AC
-------	---------------


▼ CPU (Optional)

Processor	Intel i3 / i5
RAM	4 GB / 8 GB / 16 GB
HDD	256/ 512 GB / 1 TB
Operating System	Windows 10
Keyboard & Mouse	Available




Application Scenarios


Meeting room

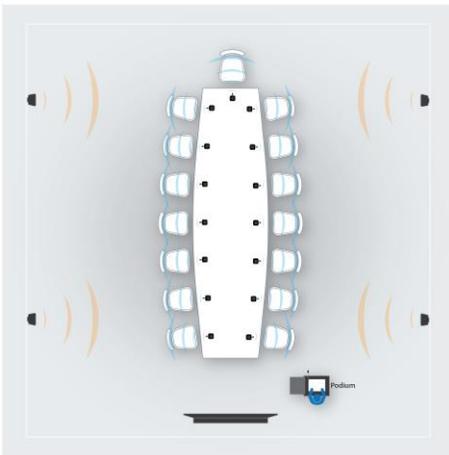

Classroom / Training room

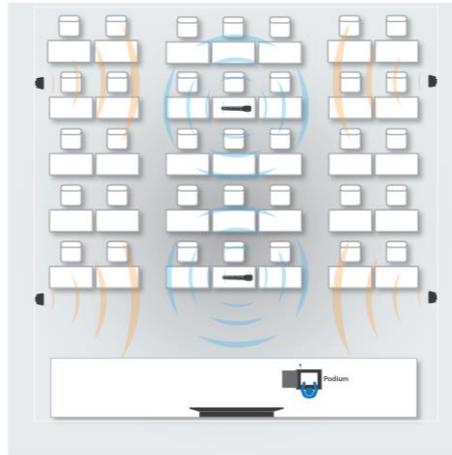

Auditorium

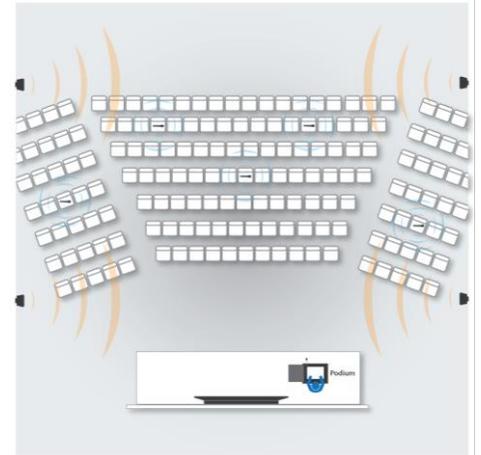

Disclaimer : Room setup diagrams provided for reference only. Actual room setup and size may vary as per requirements.

Ordering Information

Part Code : PCU – PDP – EP – ULTRA PLUS

SALES AND INQUIRIES

Global Headquarters

Q3-A3, 10th Floor Cyber Towers,
HITEC City, Hyderabad, Telangana
500081, India
Phone: +91 9100123013
Email: vc@peoplelinkvc.com

International Contact Numbers

USA: +1 669-696-8383
Australia: +61 370 037070
France: +33 6 80 75 26 42
Middle East: +966 5300 19292
UK: +44 20 4571 5454

Tech Support

Toll Free: 1800 208 3399
customersupport@peoplelinkvc.com